First Nations Water Rights in British Columbia

A Historical Summary of the rights of the High Bar First Nation

DOC
BC
W324
D:F57H55
2000
c.3

WATER BC our vital resource
Ministry of Environment, Lands and Parks

LEGISLATIVE LIBRARY
VICTORIA BC V8V 1X

BRITISH COLUMBIA

LEGISLATIVE LIBRARY OF BRITISH COLUMBIA
3 3298 00235 8498

100-07577/

MINISTRY OF ENVIRONMENT, LANDS and PARKS
WATER MANAGEMENT BRANCH

FIRST NATIONS WATER RIGHTS IN BRITISH COLUMBIA:

A Historical Summary of the rights of the High Bar First Nation

Research and writing by:	Diana Jolly
Edit by:	JOL Consulting
Review by:	Gary W. Robinson
Prepared for publication:	March, 2000

Canadian Cataloguing in Publication Data
Jolly, Diana.
First Nations water rights in British Columbia. A historical summary of the rights of the High Bar First Nation

ISBN 0-7726-4235-4

1. Water rights - British Columbia - High Bar Indian Reserve No. 1. 2. Shuswap Indians - British Columbia - Clinton Region - Government relations. I. JOL Consulting (Firm) II. Robinson, Gary W. III. British Columbia. Water Management Branch. IV. Title. V. Title: Historical summary of the rights of the High Bar First Nation.

KEB529.5.W3J662 2000 346.71104'32 C00-960160-0
KF8210.W38J662 2000

ACKNOWLEDGMENTS

The Ministry of Environment, Lands and Parks wishes to acknowledge three partners whose contributions were invaluable in the completion of the *Aboriginal Water Rights Report Series:*

The Ministry of Aboriginal Affairs, was a critical source of funding, support and direction for this project.

The U-Vic Geography Co-op Program, was instrumental in providing the staffing resources needed to undertake this challenging task. Through the services of June Whitmore and her office, the project benefited from the research, writing, editing and co-ordination of these outstanding students:

Jas Gill
Julie Steinhauer
Kelly Babcock
Daniella Mogus
Miranda Griffith
Christina Rocha
Rachel Abrams
Elizabeth Lee
Sara Cheevers

The services of Clover Point Cartographics Limited of Victoria, was responsible for the preparation of most of the map drawings, which form a valuable part of these documents.

In addition to these three key partners, I must acknowledge the valuable contributions of other Water Management staff, past and present, including Jack Farrell, Jim Mattison, Richard Penner, Diana Jolly, Greg Blaney, Gary Lucas and Kim Johnston.

The sheer numbers of First Nations groups' with histories of water rights made the completion of the Report Series seem, at times, prolonged. The determination, patience and vision of the partners was essential in the completion of the Series and is gratefully acknowledged.

Gary Robinson
Project Manager
Water Management Branch

TABLE OF CONTENTS

LOCATION 1

WATER ALLOCATIONS 2

HISTORY, CURRENT STATUS, AND NOTES: 2
HIGH BAR #1 3
Barney Creek 3
History 3
Current Status 3
Notes 3

Butcher Creek 3
History 3
Current Status 3
Notes 4

Indian Creek 4
History 4
Current Status 4
Notes 4

Lebasque Creek 5
History 5
Current Status 5
Notes 6

Watson Bar Creek 6
History 6
Current Status 6
Notes 6

OTHER INFORMATION 7

APPENCICES:

TAB NO.

1. TABLE: Summary of Water Rights Records for the High Bar Band.

2. RECORD OF MINUTE OF DECISION (AGBC #590461).

3. ORDER IN COUNCIL (368/1908).

4. APPLICATION, LICENCE AND PLAT (Conditional Water Licence 7165).

5. STREAM REGISTER REPORTS (Barney Creek, Butcher Creek, Indian Creek, Lebasque Creek, Watson Bar Creek).

6. MAP: High Bar #1, High Bar #1A and High Bar #2 Reserves and area.

FIRST NATIONS WATER RIGHTS REPORT

BAND: High Bar Indian Band

ADDRESS: PO Box 45, Clinton B.C., V0K 1K0

CHIEF: Gordon Prosper

PHONE: 459-2355 **FAX:** N/A

AFFILIATION: Shuswap Nation Tribal Council

LOCATION:

The High Bar Band occupies 3 separate reserves in the Central Interior Region, west of Clinton.

The three reserves are:

- ¥ High Bar 1 - a 1183.3 hectare reserve located along the Fraser River, west of Clinton.
- ¥ High Bar 1A - a 49.8 hectare reserve located adjacent to the southwest portion of High Bar 1, on the right bank of the Fraser River.
- ¥ High Bar 2 - a 273.2 hectare reserve located adjacent to the southern portion of High Bar 1, on the right bank of the Fraser River.

These reserves sit within the central region at elevations ranging from 900 to 3,000 feet above mean sea level, and experience a climate ranging from an average daily temperature of -5 to -10 degrees centigrade in January to 16 degrees centigrade in July. The average annual rainfall for this area is 30 - 50 centimetres.

The most recent population figures from the Ministry of Finance show High Bar Band to have a population of 3 persons living on-reserve as registered members. It's total population, including registered and non-registered members living on-reserve, on crown land and off-reserve is 48.

Water courses of significance include:

- ¥ Barney Creek, which flows west into the Fraser River, and is located across the Fraser River from High Bar 2.
- ¥ Butcher Creek, located south of Barney creek, flows west into the Fraser River.
- ¥ Indian Creek, which flows west, through the southern tip of High Bar 1, and drains into Fraser River.

- Lebasque Creek, which flows southwest, through High Bar 1, and drains into the Fraser River.

- Watson Bar Creek, which flows northeast, through the western section of High Bar 1, and drains into the Fraser River.

WATER ALLOCATIONS:

Water Rights of the High Bar Band have been recorded or affected by five actions of government over the years:

1) Allotments by the Indian Reserve Commissioners.

   Following confederation, the Province and the Dominion established an Indian Reserve Commission to reserve lands for the Indians and for transfer of those lands to the Dominion. In setting apart lands for reserves, the Reserve Commissioners made it their practice to allot water with lands. It is understood that this practice was unique among Indian Reserves in Canada and the authority of the Commissioners to allot water rights has always been disputed by the Province.

2) Lieutenant Governor in Council approval by Order in Council of the granting of water rights.

3) Determinations of the Board of Investigation under the *Water Act, 1914* of claims of the Department of Indian Affairs, and subsequent issue of water licences.

4) Granting of water licences from Federal Government applications for licences for the use of water on reserve.

5) Actions to amend rights under licences pursuant to provisions in the *Water Act.*

HISTORY, CURRENT STATUS, AND NOTES:

No indication has ever been made of any water licences having been granted to the High Bar Band with respect to High Bar 1A and High Bar 2. In addition, no evidence is available to indicate that any allocation of water rights to these reserves have ever been intended.

The history of water rights, the current status of rights and notes for the High Bar Band with respect to the water sources on High Bar 1 are as follows:

HIGH BAR #1

Barney Creek

History:

July 25, 1881 Minute of Decision of the Indian Reserve Commission, constituting High Bar Reserve No. 1:

> *"...Surplus waters of Barney, Butcher and Watson Bar Creeks are reserved for the use of the Indians."*

Current Status:

There are no water licences on Barney Creek for the benefit of the High Bar Band.

There is one active, third party licence on Barney Creek, which authorizes the diversion of 500 gallons of water a day for domestic purpose and 200 acre feet of water per annum for irrigation purpose. The date of precedence for this licence is April 4, 1940.

Notes:

1. The allocation of water from Barney Creek, made by the Indian Reserve Commission, with respect to the High Bar Band, has not been formally recognized by the Province.

Butcher Creek

History:

July 25, 1881 Minute of Decision of the Indian Reserve Commission, constituting High Bar Reserve No. 1:

> *"...Surplus waters of Barney, Butcher and Watson Bar Creeks are reserved for the use of the Indians."*

Current Status:

There are no water licences on Butcher Creek for the benefit of the High Bar Band.

There are a total of 3 licences on Butcher Creek. Of these licences:

- three authorize the diversion of small quantities of water for irrigation purpose, with a total amount authorized of 33.75 acre feet per annum.
- one authorizes the diversion of 500 gallons of water a day for domestic purpose.

Note: some licences authorize more than one purpose.

Notes:

1. The allocation of water from Butcher Creek, made by the Indian Reserve Commission, with respect to the High Bar Band, has not been formally recognized by the Province.

Indian Creek

History:

July 25, 1881 Minute of Decision of the Indian Reserve Commission, constituting High Bar Reserve No.1:

"The water of a small spring known as Indian Creek."

Current Status:

There are no water licences on Indian Creek for the benefit of the High Bar Band.

There is one active third party licence on Indian Creek, which authorizes the diversion of 1,000 gallons of water a day for stock watering purpose. The date of precedence for this licence is April 21, 1981.

Notes:

1. The allocation of water from Indian Creek, made by the Indian Reserve Commission, with respect to the High Bar Indian Band, has not been formally recognized by the Province.

Lebasque Creek

History:

July 25, 1881 Minute of Decision of the Indian Reserve Commission, constituting High Bar Reserve No.1:

> *"...the water of the creek running past the Indian houses"*

The sketch of the High Bar Reservation No. 1, which accompanies the minute of decision, shows a Indian Village by a creek now named Lebasque Creek. It is assumed that Lebasque Creek was the creek referred to in the Minute of Decision.

Dec 27, 1890 An Indian Agent applied for 25 inches of water from a small stream flowing through the reserve to be carried through the present ditch.

June 11, 1920 At a final hearing before the Board of Investigation, acting pursuant to the *Water Act 1914*, the Board determined that a valid water record affecting the claim of the Department of Indian Affairs to rights to the use of the waters of Lebasque Creek, (previously referred to in the Indian Agent's application as the small unnamed stream) was made under authority of an Act passed prior to the 12th day of March, 1909. The Order of the Board, numbered 5747 set out that a conditional licence should be issued which would:

(i) provide for the diversion of water from Lebasque Creek,
(ii) take precedence from the 23rd day of February, 1891,
(iii) authorize the diversion of a maximum of 270 acre feet of water a year for the irrigation of 90 acres of High Bar I.R. (No. 1 High Bar) east of Fraser River, provided that 3,000 gallons of water a day throughout the year could also be used for domestic purpose.

Oct 22, 1923 The Comptroller of Water Rights issued Conditional Water Licence 7165, which embodied the terms and conditions set out in Board Order 5747.

Current Status:

Conditional Water Licence 7165, in the name of the High Bar Band, is the only licence on Lebasque Creek.

Notes:

1. The allocation of water from the unnamed creek (now Lebasque Creek), made by the Indian Reserve Commission, with respect to the High Bar Band, is consistent with the allocation made under Conditional Water Licence 7165.

Watson Bar Creek

History:

July 25, 1881 Minute of Decision of the Indian Reserve Commission, constituting High Bar Reserve No. 1:

> *"...Surplus waters of Barney, Butcher and Watson Bar Creeks are reserved for the use of the Indians."*

June 2, 1908 By Order, the Lieutenant Governor-in-Council authorized that a grant of water rights be made in favour of the High Bar Indian Band:

> *"Water Record No. 64 dated November 3, 1903, issued to the High Bar Indians for 200 inches of water from Watson Bar Creek for use on the High Bar Indian Reservation."*

Current Status:

There are no active water licences on Watson Bar Creek. Currently, there are two outstanding, third party applications on Watson Bar Creek.

Notes:

1. The allocation of the water from Watson Bar Creek, made by the Indian Reserve Commission, with respect to the High Bar Band, has not been formally recognized by the Province.

2. The allocation of 200 inches of water from Watson Bar Creek made by the Lieutenant Governor-in-Council by Order, has not been recognized under the *Water Act, 1914*.

OTHER INFORMATION

Additional Water Records

The Minute of Decision of the Indian Reserve Commission, dated July 25, 1881, also granted

> *"the exclusive right of fishing on both banks of the Fraser river, commencing at a point 1/2 mile below Barney creek, and extending up stream to the Northern boundary of the reserve [High Bar #1], a distance of about 16 miles."*

Groundwater Records

Review of records of the Groundwater Section finds no evidence of any wells on the High Bar Indian Reserves. However, as provision of this information is voluntary, it can not be assumed to be complete.

Municipal Water Sources

At this time the potential for water supply from a municipality is limited as there are no municipal water systems in the proximity of the High Bar Indian Reserves.

Summary of Water Rights Record High Bar First Nation								
Water Source	**Priority Date**	**Reserve Name**	**File Number**	**Document Type**	**Status**	**Superceded By**	**Licence PUC/MOD & OIC Allotments**	**Comments**
Barney Creek Butcher Creek, Watson Bar Creek	1881/07/25	High Bar #1	AGBC 590461	MOD			*"Surplus waters"*	IRC Allocations: Not formally recognized by the Province.
Indian Creek, unnamed creek (Lebasque Creek)	1881/07/25	High Bar #1	AGBC 590461	MOD			*"The water of a small spring…"*	IRC Allocations: Not formally recognized by the Province.
Lebasque Creek	1891/02/23	High Bar #1	0241094	C 7165	Current		3,000 GAD/Domestic 270 AF/Irrigation	
Watson Bar Creek	1908/06/04	High Bar #1	AGBC 676	OIC			*"200 inches of water"* (converted equivalent=1332.8)	The allocation of 200 inches of water from Watson Creek made by the LGCO, has not been recognized under the *Water Act, 1914*.

Geo. A. Walkem

Minutes of Decision.

High Bar Mining.

A Ferry, situated on both sides of the Fraser river at High Bar, adjoining the pre-emption of James Reed.

Commencing at a post on the left bank of Fraser river, and running thence East 20 chains; thence South 80 chains; thence East 20 chains; thence South 80 chains; thence East 60 chains; thence South 20 chains; thence East 160 chains; thence South 100 chains; thence East 40 chains; thence South 80 chains; thence West across the Fraser river 120 chains; thence North 20 chains; thence West 80 chains; thence North 20 chains; thence West 110 chains; thence North to the left bank of Fraser river; and thence up the bank of the said river to place of Commencement.

A Store-yard 20 x 15 links, situated S. 25° W. of Mr. J. Reed's house, and about 160 yards distant from it is reserved.

Fishery.

The exclusive right of fishing on both banks of Fraser river, commencing at

High Bar Indians.

Fishing — Continued.

at a point ½ mile below Barney creek, and extending up stream to the Northern boundary of the reserve, a distance of about 6 miles.

Water.

~~The Water of the small Spring Reserve as Indian Creek, the Water of the Little Swimming pool the Indians use,~~ and the Surplus Water of Barney, Butcher, and Watson Bar Creeks are reserved for the use of the Indians.

High Bar B. C.
July, 25th 1881

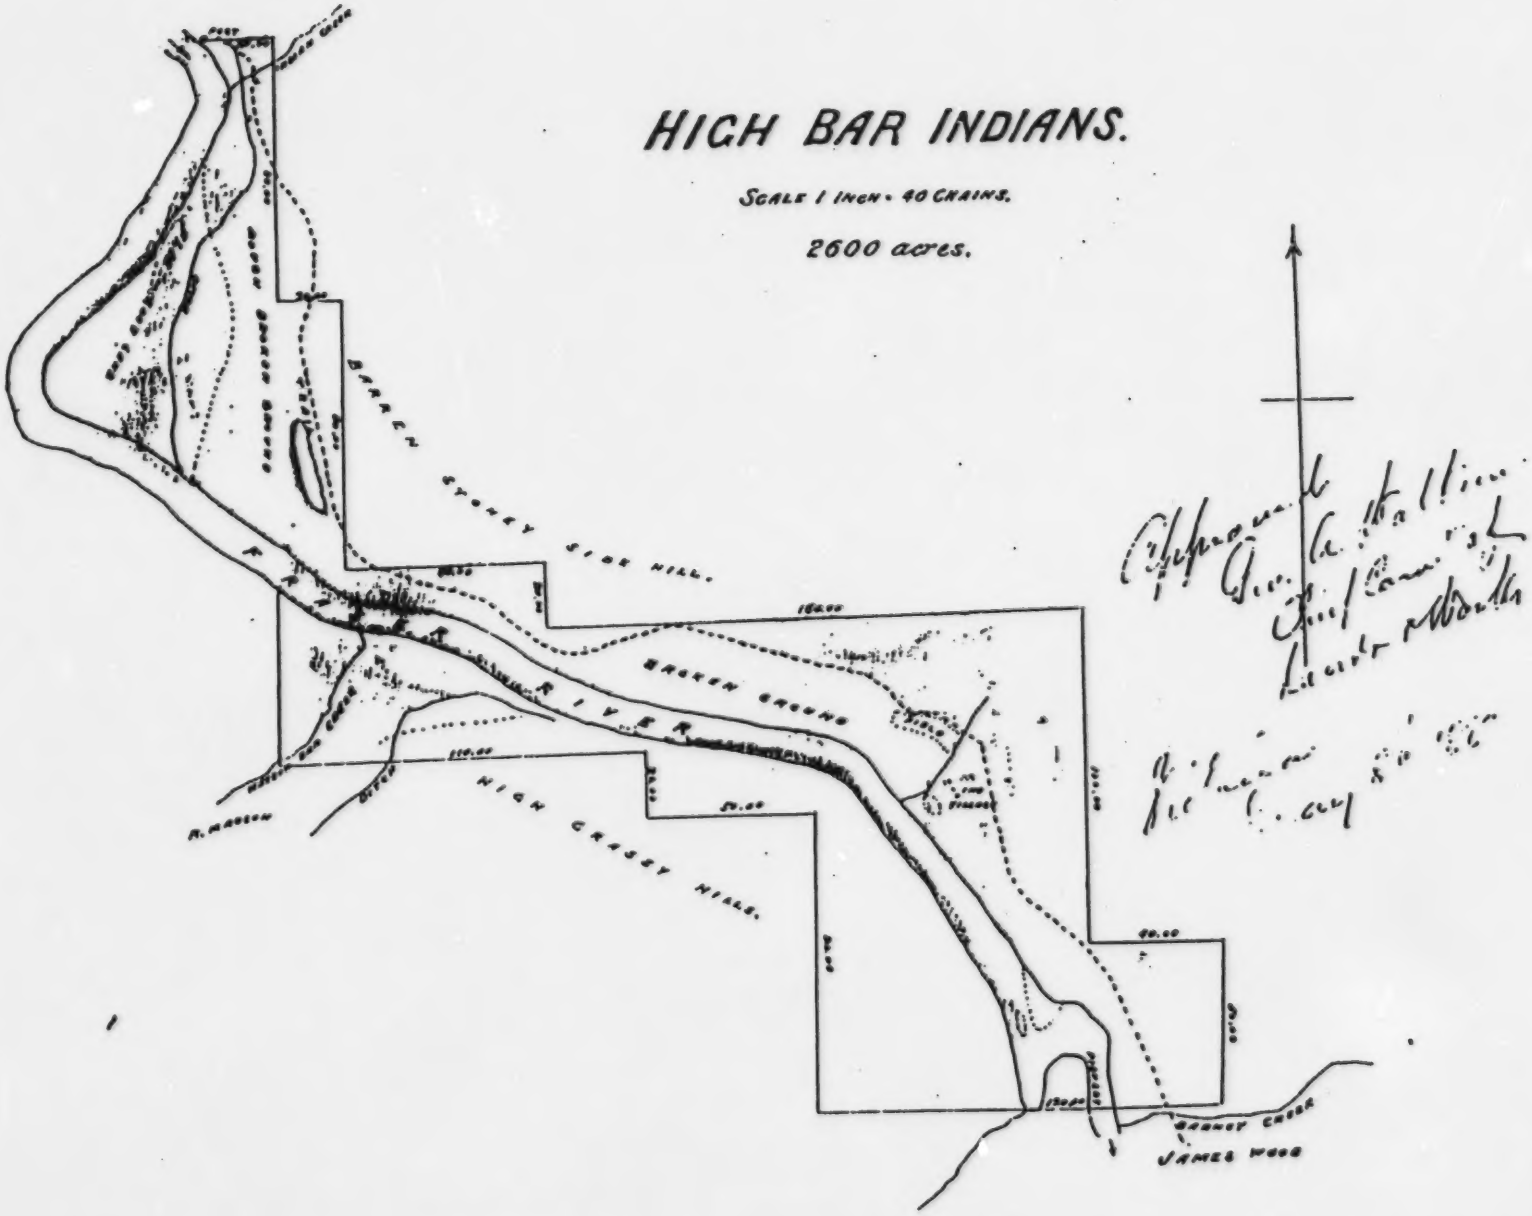
HIGH BAR INDIANS.
SCALE 1 INCH = 40 CHAINS.
2600 acres.
BARREN
STONEY SIDE HILL.
BROKEN GROUND
RIVER
HIGH GRASSY HILLS.
JAMES WOOD

368.
1908.

Dated 4th June

ORDER IN COUNCIL

providing for

Confirmation of Water Records for certain Indian Reserves.

AGBC 676

At the Executive Council Chamber, Victoria, B. C.,

The 2nd: *day of* June, *A. D. 190*8.

Present:

The Honourable

Mr. McBride. *in the Chair.*

Mr. Fulton.

Mr. Tatlow.

Mr. Young.

Mr.

On the recommendation of the Honourable

The Chief Commissioner of Lands and Works,

and under the provisions of _____ *Chapter* 190: R. S.,

His Honour the ~~Lieutenant Governor~~ Administrator *of British Columbia, by and with the advice of his Executive Council, doth order as follows:* that the Water Records referred to in the annexed Minute of Council be and are hereby ratified and confirmed and that certified ~~copies~~ a copy of ~~Order in Council~~ the Minute dated be forwarded to the Assistant Commissioner of Lands and Works at Clinton (Lillooet) and to A. W. Vowell, Superintendent of Indian Affairs at Victoria, ~~respectively~~.

A. Campbell Redde
Deputy Clerk ~~Executive~~ Executive Council.

APPROVED AND ORDERED THIS 2nd DAY OF June, A.D. 1908

J. McBride
Administrator.

Ld. 5/6

To His Honour
The Lieutenant-Governor in administrator / Council

The undersigned has the honour to report for the con. Council:-

That the following Water Records have been issued by the Assistant Commissioner of Lands and Works at Clinton under the provisions of the Water Clauses Consolidation Act, without first having obtained the authority of the Lieutenant Governor in Council as provided by said Section.

Water Record No. 15 dated April 5th, 1902, issued to the Indian Reserve, McCartneys Flat below Lillooet, for 20 inches of water out of a small spring adjoining the said Indian Reserve, for use on the Indian Reserve, McCartneys Flat.

Water Record No. 20, dated August 24th, 1903, issued to Fountain Indian Reserve, Lorenco Valley for 100 inches of water out of We-o-mis Creek, for use on Indian Reserve, Lorenco Valley.

Water Record No. 26, dated January 9th, 1900, issued to Anderson Lake, Indian Reservation, for 100 inches of water from a small stream flowing from the mountain on the West side of Anderson Lake Reserve about a quarter of a mile from the head of the lake for use on Anderson Lake, Indian Reservation.

Water Record No. 56, dated November 7th, 1902, issued to Dona Carte Indian Reservation No. 2, for 100 inches of water from Hat Creek for use on Dona Carte Indian Reservation No. 2.

Water Record No. 59 dated May 18th, 1903, issued to Lillooet Indian Reservation for 100 inches of water out of three small springs about four miles north of the town of Lillooet for use on Lillooet Reservation.

Water Record No. 64 dated November, 3rd, 1903, issued to the High Bar Indians for 200 inches of water from Botsen Bar Creek for use on the High Bar Indian Reservation.

Water Record No. 65 dated June 20th, 1904, issued to the Fountain Indians for 100 inches of water from Fountain Creek for use on the Fountain Indian Reserve.

Water Record No. 78 dated September 1st, 1905, issued to the Pavilion Band of Indians for 100 inches of water from a small stream running into a lake named on the Indian Map No. 3, in Marble Canyon, for use on Pavilion Indian Reserve No. 3.

Water Record No. 82 dated September 1st, 1905, issued to the Pavilion Band of Indians for 30 inches of water from a small stream on the Mountain side above a lake named on the Indian Map No. 3, in Marble Canyon for use on the Pavilion Indian Reserve No. 3.

AND TO RECOMMEND that the aforementioned Water Records be ratified and confirmed as from their respective dates of issue subject to such prior rights as existed and that certified ~~copies~~ copy of ~~the Order-in-Council~~ this Minute if approved be forwarded to the Assistant Commissioner of Lands and Works at Lillooet and to A. W. Vowell, Superintendent of Indian Affairs at Victoria, respectively.

Dated this 30th day of May, A.D. 1908.

Wm. J. Sutton

Chief Commissioner of Lands and Works.

Approved this 2nd day of ~~May~~ June, A. D. 1908.

Presiding Member of the Executive Council.

4108

90

LANDS & WORKS DEPARTMENT
DEC 27 1890
VICTORIA, B. C.

GOVERNMENT OFFICE
DEC 19 1890
CLINTON, B. C.

Victoria 31/12/90

Sir

I have honour to report that Mr. W. Thomson Indian Agent for this District, gave notice in the Govt. Gazette of March 28th 1889 and also in the Kamloops "Sentinel" of similar date, of his intention to apply to you for permission to divert and use for the purposes of irrigation on Indian Reserves in this District, certain lakes as set out in his Notice of Application.

Mr. Thomson now applies for a Record to be made of the various described applications.

The amount of water applied for, in each case, as a rule is very small and with few exceptions are not already claimed by white settlers.

For your reference I have annexed the original Copies of notice of intention, and my remarks on each application, and enclose same herewith, awaiting your instructions with regard Record.

I have the honour to be
Sir
Your Obedient Servant
[illegible]
Asst. Commissioner

Hon. C. F. Vernon,
Chief Commissioner Lands & Works
Victoria

2

Silloot District

No objections to this record

This water already recorded by white settlers

This water already recorded by white settlers

No objection to this record

Fifty inches is sufficient.

Subject to existing records

Subject to existing rights and records

Subject to existing records.

No objection to this record.

No objection to this record

Subject to existing records

Subject to existing records

PROVINCE OF BRITISH COLUMBIA. **WATER RIGHTS BRANCH.** DEPARTMENT OF LANDS.

DETERMINATION AND ORDER.

(FOR A CONDITIONAL WATER LICENCE FOR IRRIGATION PURPOSES.)

BY THE BOARD OF INVESTIGATION
UNDER THE "WATER ACT, 1914."

In the Matter of the Claims of the Department of Indian Affairs to Rights to the Use of the Waters

of Lebaque Creek

in the neighbourhood of Big Bar Creek, in the

Lillooet Water District.

NOW, on the 11th day of June, 1920, the above-entitled matter coming on regularly for final hearing before the Board of Investigation; due notice having been given of the time and place of hearing; all and every the steps required under the Act to be taken by the Board before a determination of the said rights and claims should be made having been taken; all evidence, testimony, and proofs filed with the Board or presented in the above-entitled matter having been duly considered; a quorum of the Board being present at the hearing; and the Board being now fully advised in the premises, determines with respect to the said claims (which are on file and designated as Indian File No. 4-15-1) that a valid record affecting the said claim was made under authority of an Act passed prior to the 12th day of March, 1909, and that, under the said water record the High Bar tribe or band of Indians was granted a right to take and use water from Lebaque Creek, a tributary of the Fraser River, for irrigation and domestic purposes on the High Bar I.R., being Reserve No. 1 of the said tribe or band.

Form 388, W.R.B. -2,000-12-20.

Order No. 5747.

Copy for Comptroller

2. The claims of the Department of Indian affairs with respect to the said waters are allowed by the Board to the extent hereinafter specified, and the Comptroller of Water Rights is hereby directed to issue a conditional licence in respect thereof embodying the following terms and conditions:—

(*a*.) The sources of the water supply is Lehaeque Creek.

(*b*.) The points of diversion from the said sources are located as shown in the exhibit marked "A" hereto attached, which is incorporated herewith and made a part hereof, the original of which exhibit is on file in the office of the Comptroller of Water Rights, Parliament Buildings, Victoria, B.C.

(*c*.) The date from which the said licence shall take precedence is

23rd February, 1891.

(*d*.) The purpose for which the water is to be used is irrigation.

(*e*.) The maximum quantity of water per annum which may be used when irrigation is extended to all the lands mentioned in subclause (*g*) of this clause, until lawfully altered, is two hundred and seventy (270) acre-feet, and the maximum quantity of water which may be used per annum on each acre actually irrigated until lawfully altered is three (3) acre-feet: Provided that where sources of supply other than those named in subclause (*a*) hereof are drawn upon for the irrigation of a part or all of the same lands as are described in subclause (*g*) hereof, the maximum quantity of water which may be used under the licence hereby directed to be issued shall be reduced by the quantity which the licensee may be entitled to use from said other sources of supply: Provided further that when the Engineer of the Water District has accumulated the requisite hydrographic data for determining to the satisfaction of the Comptroller the *pro rata* part of the said total quantity to be apportioned to the licence hereby directed to be issued, the Comptroller shall require the surrender of the licence, and shall amend the same by stating the particular quantity to which the licensee is entitled from the particular sources named therein.

(*f*.) The period of the year during which the water may be used is between the first day of April and the thirtieth day of September.

(*g*.) The water may be used on that part of the High Bar I.R. (No.1 High Bar) east of Fraser River, of which ninety (90) acres are said to be irrigable. The extent and location of the said irrigable lands are more particularly shown in the said Exhibit "A."

(*h*.) The works which are required to be constructed before the issue of a final licence are the clearing, stumping, and levelling of the irrigable lands on the said reserve and the additional works required for conducting thereto the maximum quantity of water hereby authorized to be diverted.

(*i*.) The execution of the said works shall be commenced or resumed on or before the first day of June, 1924, and shall be prosecuted with due diligence and in a workmanlike manner and to the satisfaction of the Comptroller of Water Rights.

(*j*.) The said works shall be completed and the quantity of water to which the licensee is entitled beneficially used for the purpose set out in the licence on or before the first day of November, 1930.

(*k*.) Before any change is made in the said works which would be a material deviation from the plans as approved or the works as accepted by the Comptroller, plans of such proposed change must be filed with the Comptroller and approved by him.

(*l.*) The nature and the extent of the incidental uses permitted under the licence are: For domestic purposes, the use of 3,000 gallons a day of water from any or all the said sources of supply during the whole of the year; and for storage purpose, such quantity of water (not exceeding [redacted] acre-feet) as, together with the natural flow-water used hereunder, will be necessary to secure to the licensee the quantity granted hereunder. The water which may be so stored shall be that of [redacted] and it may be stored (accumulated) in a reservoir at [redacted] between the first day of October in each year and the first day of June in the succeeding year, and may be used as provided for in subclauses (*d*), (*e*), and (*f*) of this clause, but such uses shall not enlarge the quantity of water allowed by subclause (*e*) hereof.

(*m.*) The Board may extend the time for the commencement, resumption, or completion of the execution of the works on being satisfied that it is in the public interest and that it will not injuriously affect the rights of any licensee.

(*n.*) The licence shall not in any way be deemed to be a final licence for the use of water, but shall have the effect only of a conditional licence issued under Part V. of the "Water Act, 1914," and shall be subject to all the provisions of the said Act, including the filing of proof of the completion of the said works and the putting of the water to such beneficial use within the time limited by the provisions of section 117 of the said Act.

3. Pending the issue of the licence hereby authorized to be issued, the terms and conditions of this order shall govern the respective rights of the record-holders or claimants affected thereby.

Made and entered this 22nd day of October, 1923

THE BOARD OF INVESTIGATION.

By "J.S.T.Alexander", [redacted] Member.

and "J.E.Lane", *Member.*

Copy for Comptroller

Form 387, W.R.B.—2,000-12-20. Order No. 5747.

British Columbia.

To accompany Order No 5747 Precinct

LILLOOET WATER DISTRICT.

Scale, 80 Chains to 1 Inch.

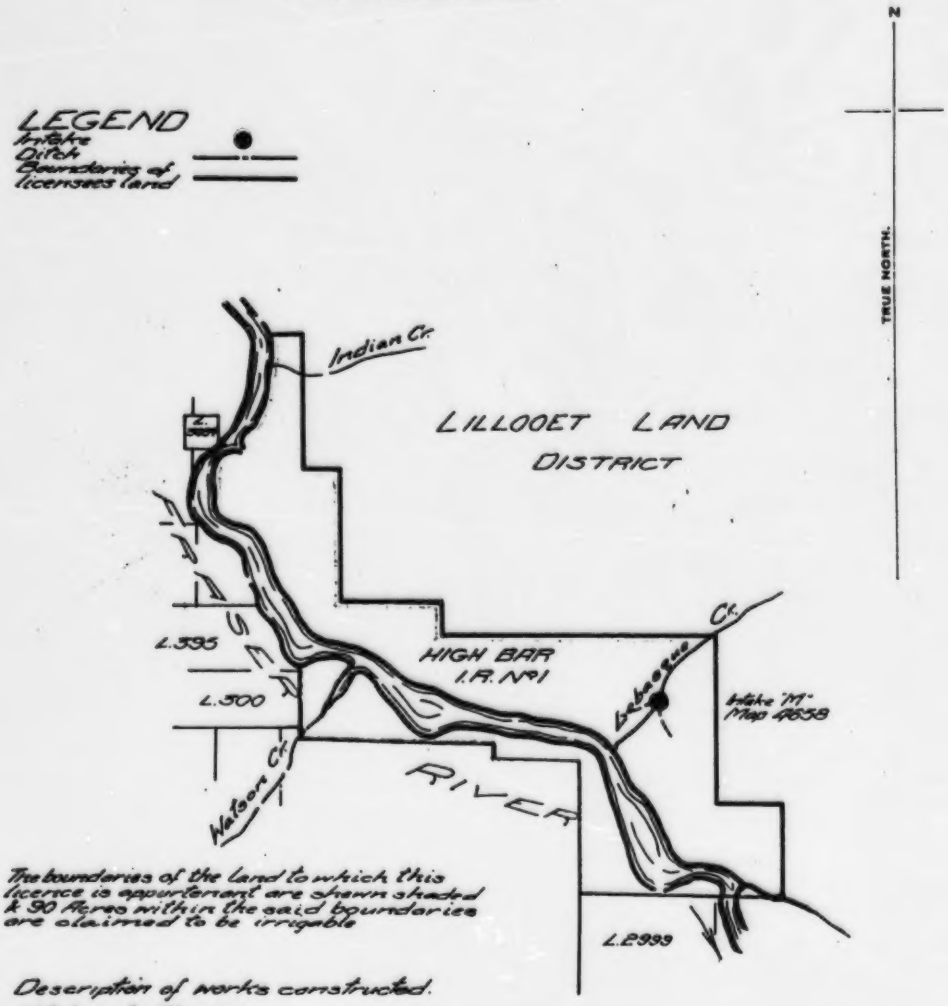

The boundaries of the land to which this licence is appurtenant are shewn shaded & 90 Acres within the said boundaries are claimed to be irrigable

Description of works constructed.
Ditches & Flumes.

Signature J.S. Alexander
J.E. Shane
22 Oct. 1923

C.L. 7165 B.O. 5747
File 4.13.1

GRT CTH.

EXHIBIT 'A'

PROVINCE OF BRITISH COLUMBIA. | WATER RIGHTS BRANCH. | DEPARTMENT OF LANDS.

CONDITIONAL WATER LICENCE.

(For a n Irrigation Purpose.)

WHEREAS the Board of Investigation, constituted and acting under the "Water Act, 1914," duly held an investigation respecting the water set out in the order No. 5747, duplicate of which is hereto attached, and in the said order directed the Comptroller of Water Rights to issue a conditional licence in respect of the particular record and claim respectively set out therein, and further therein named the terms and conditions to be embodied in the said licence:

NOW, THEREFORE, I, Comptroller of Water Rights of the Province of British Columbia, in pursuance of the said order and in conformity with the "Water Act, 1914," issue this conditional licence, and declare the rights in and to the use of the said waters held under the said record in respect of the said claim to be such as are set out in the said order; and the terms and conditions of the said order and any exhibits which are therewith incorporated are hereby incorporated herewith and form a part hereof. This licence is appurtenant to that part of High Bar Indian Reserve (No.1 High Bar) east of Fraser River.

Made and entered this 22nd day of October, 192 3

E. A. Cleveland
Comptroller of Water Rights.

No. 7165

Form No. 1006, W.R.B. (Licence in respect of Board Order)—1,500-1-22—504.

Stream Register Report Water Licence Information System

Report Requested By : DJOLLY
Date Report Requested : 1996/01/24 14:10
Report Sorted By : Source Gazetted - Priority Date - Licence Number
Selection Criteria
START POINT : FD48111 - 256 A
END POINT : SQ8550 - Barney Creek left of Fraser River

Priority YYYY/MM/DD	Licence Number	File Number	Appurtenancy	Licensee	POD	Quantity/Units	Term Start	Term End	Licence Comments	Process Status
1960/04/19	C014486	0139421	82.3 AC OF L 26 LILLOOET DIST	WILLIAMS S T & AUDREY BOX 394 CLINTON BC V0K1K0	DOM IRR	500.00 GD 200.00 AF	Jan 01 Apr 01	Dec 31 Sep 30		
Source			MR Map	POD	RED POD Comments				Prec	
Barney Creek			MR256	A	N				02J ASH - PAVILION	

---------- Total of 1 Licence Reported ----------

Stream Register Report Water Licence Information System

Report Requested By : DJOLLY
Date Report Requested : 1996/01/24 14:10
Report Sorted By : Source Gazetted - Priority Date - Licence Number
Selection Criteria
START POINT : FD48108 - 256 MM
END POINT : SO8549 - Butcher Creek left of Fraser River

Priority YYYY/MM/DD	Licence Number	File Number	Appurtenancy	Licensee	PUC	Quantity/Units	Term Start	Term End	Licence Comments	Process Status
	Source		WR Map	POD	RED POD Comments				Prec	
1975/04/08	C053259	0346615	5 AC OF L 26 LILLOOET DIST	WILLIAMS S T & AUDREY BOX 394 CLINTON BC V0K1K0		IRR	15.00 AF	Apr 01	Sep 30	
	Butcher Creek		WR256	BB	N				02J ASH - PAVILION	
1975/04/08	F067366	0328612	1.25 AC OF L 27 LILLOOET DIST	STADLER HERMAN WIMMER BERNARD 8261 ASCHAU A INN HAUPTSTRASSE 11		DOM IRR	500.00 GD 3.75 AF	Jan 01 Apr 01	Dec 31 Sep 30	
	Butcher Creek		WR256	JJ	N				02J ASH - PAVILION	
1984/02/10	C067506	3000508	5 AC OF L 381 LILLOOET DIST	DAVIES BRIAN D & DOROTHY L BOX 304 CLINTON B C V0K1K0		DOM IRR	500.00 GD 15.00 AF	Jan 01 Apr 01	Dec 31 Sep 30	
	Butcher Creek		WR256	HH	N				02J ASH - PAVILION	

---------- Total of 3 Licences Reported ----------

Stream Register Report Water Licence Information System

Report Requested By : DJOLLY
Date Report Requested : 1996/01/24 12:57
Report Sorted By : Source Gazetted - Priority Date - Licence Number
Selection Criteria
START POINT : FD39124 - 250 S
END POINT : SO8559 - Indian Creek left of Fraser River

Priority YYYY/MM/DD	Licence Number	File Number	Appurtenancy	Licensee	PUC	Quantity/Units	Term Start	Term End	Licence Comments	Process Status
	Source		WR Map	POD	RED POD Comments				Prec	
1981/04/21	C061937	0368395	THE S/W UNDERTAKING OF THE LICENSEE WITHIN DIST	FOREST DISTRICT - 100 MILE HOUSE BOX 129 100 MILE HOUSE BC V0K2E0	SW	1,000.00 GD	Jan 01	Dec 31	STOCK WATERING	
	Indian Creek		WR258	S	N				02J ASH - PAVILION	

---------- Total of 1 Licence Reported ----------

Stream Register Report Water Licence Information System

Report Requested By : DJOLLY
Date Report Requested : 1996/01/24 14:11
Report Sorted By : Source Gazetted - Priority Date - Licence Number
Selection Criteria
START POINT : PD39121 - 250 M
END POINT : SO8554 - Lebasque Creek left of Fraser River

Priority YYYY/MM/DD	Licence Number	File Number	Appurtenancy	Licensee	PUC	Quantity/Units	Term Start	Term End	Licence Comments	Process Status
	Source		NR Map	POD RED POD Comments					Prec	
1891/02/23	C007165	0241094	90 AC OF I R #1 HIGH BAR LILLOOET DIST	HIGH BAR INDIAN BAND 981-703-7295 C/O FRASER CANYON ADMIN BOX 400 LYTTON BC V0K1Z0	DOM IRR	3,000.00 GD 270.00 AF	Jan 01 Apr 01	Dec 31 Sep 30		
	Lebeaque Creek		NR258	N N					02J ASN - PAVILION	

---------- Total of 1 Licence Reported ----------

Stream Register Report Water Licence Information System

Report Requested By : DJOLLY
Date Report Requested : 1996/01/24 14:08
Report Sorted By : Source Gazetted - Priority Date - Licence Number
Selection Criteria
START POINT : FD39285 - 92.0.010 Q
END POINT : SO6556 - Watson Bar Creek right of Fraser River

Priority YYYY/MM/DD	Licence File Number	Appurtenancy Number	Licensee	PUC	Quantity/Units	Term Start	Term End	Licence Comments	Process Status
	Source	MR Map	POD	RED POD Comments				Prec	
1989/06/07	2102746	3001475 L 4698 LILLOOET DIST	GRUNDBERG MAUREEN BOX 643 ASHCROFT BC V0K1A0	DOM IRR PRRES	1,000.00 GD 400.00 AF 2.00 AF	Jan 01 Apr 01 Jan 01	Dec 31 Sep 30 Dec 31		APP APPLIC-CLEARED
	Watson Bar Creek	MR92.0.010	Q N					02J ASH - PAVILION	
1989/09/01	2102747	3001519 L 300 LILLOOET DIST	ALBIETZ KRISTIAN P & RITA S BOX 368 CLINTON BC V0K1K0	DOM SM IRR	500.00 GD 1,000.00 GD 10.00 AF	Jan 01 Jan 01 Apr 01	Dec 31 Dec 31 Sep 30		APP APPLIC-CLEARED
	Watson Bar Creek	MR258	X N					02J ASH - PAVILION	

---------- Total of 2 Licences Reported ----------

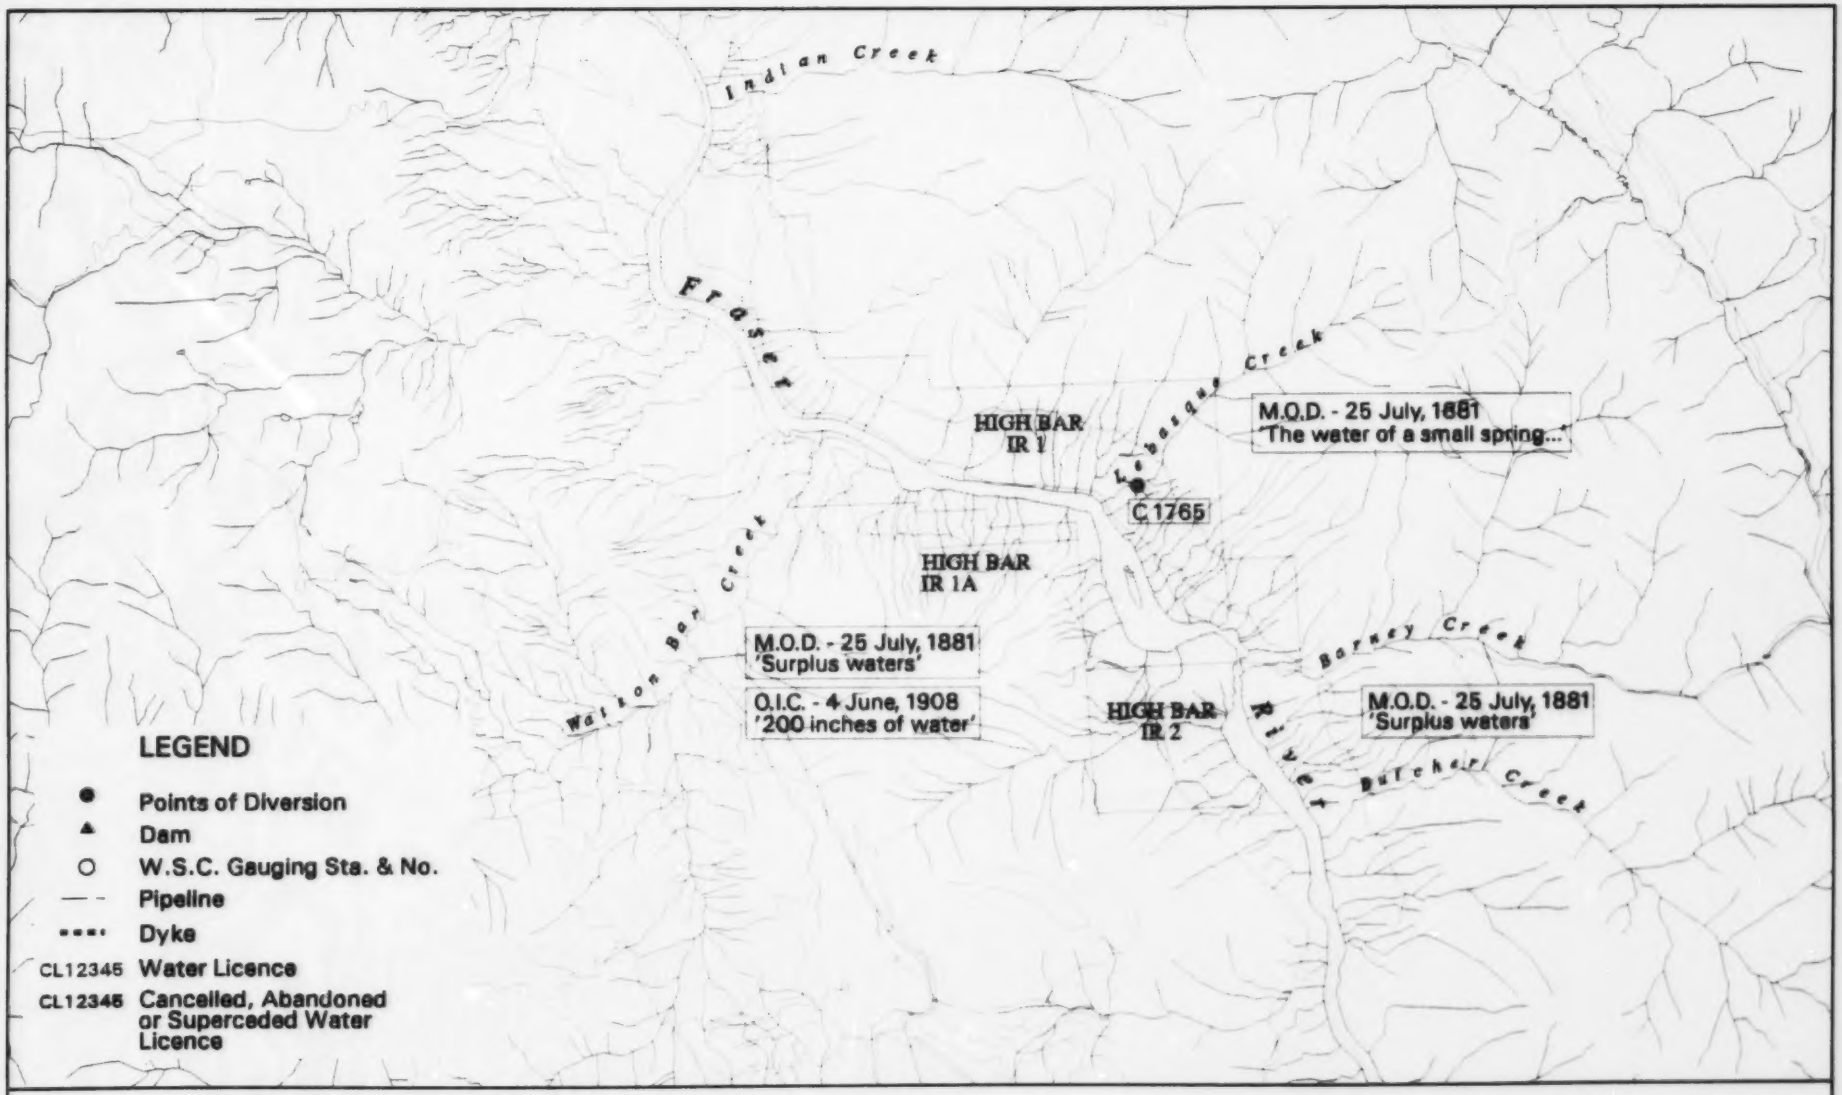

High Bar

Scale 1:75,000

Ministry of Environment, Lands & Parks

Date: March 14, 2000

Environment & Lands Division